

Up to 28 Gbit/s 850nm VCSEL Transmitter Optical Subassembly (TOSA)

Product Code: T25-850



Sample image only. Actual product may vary.

Product Description

Preliminary

The T25-850 transmitter optical subassembly (TOSA) combines a 850nm VCSEL and an optional driver IC integrated in a TO package coupled with a 50/125 μm multi mode fiber. The T25-850nm is designed for high speed data communication applications in optical transceiver modules. The device is configured for differential drive and a controlled impedance circuit is available for optimum performance.

Features

- up to 28 Gbit/s data rate
- very small size package
- low cost design
- fiber coupled 50/125 μm

Applications

- Fibre Channel 32GFC
- 100G short reach interconnects
- Research and development

Parameter	Typical (PD chips)	Notes
Emmission Wavelength	850 nm	
Data rate	up to 28 Gbit/s	
Supply Voltage	3.3V	
Power consumption	130mW	max.

All product specifications and descriptions are subject to change without notice.

Electro-optical characteristics (at Tcase = 25 °C)


Preliminary

Parameter VCSEL	Symbol	Test Condition	Min	Typ	Max	Unit
Peak emission wavelength	λ	$P_{out} = 0.5mW$	840	850	860	nm
Case operating temperature	T_{op}		-10		85	°C
RMS spectral width	$\Delta\lambda$	$P_{out} = 0.5mW$			0.4	nm
λ_p temperature coefficient	$\Delta\lambda_p$			0.06		nm/°C
Relative intensity noise	RIN	28 Gbit/s			130	dB/Hz
Rise/Fall time	T_r	$P_{out} = 0.5mW$		8		psec
	T_f	28 Gbit/s		9		psec
		20-80%				
Threshold current	I_{th}			0.7		mA
I_{th} temp variation	ΔI_{th}	T = -10 °C to 85 °C		+1.0	+2.0	mA
Laser forward voltage	V_f	$P_{out} = 0.5mW$		2.2		V

Absolute Maximum Ratings


Parameter	Symbol	Min	Max	Unit
Storage temperature	T_{St}	-40	+90	°C
Lead solder temperature	T_s		260° for 10 sec	°C
Laser forward current 85°C	I_F		7	mA
Laser reverse voltage	V_{RD}		-2	V
ESD (Human Body Model)	T_r		Class 1	

28 Gbit/s eye pattern diagram

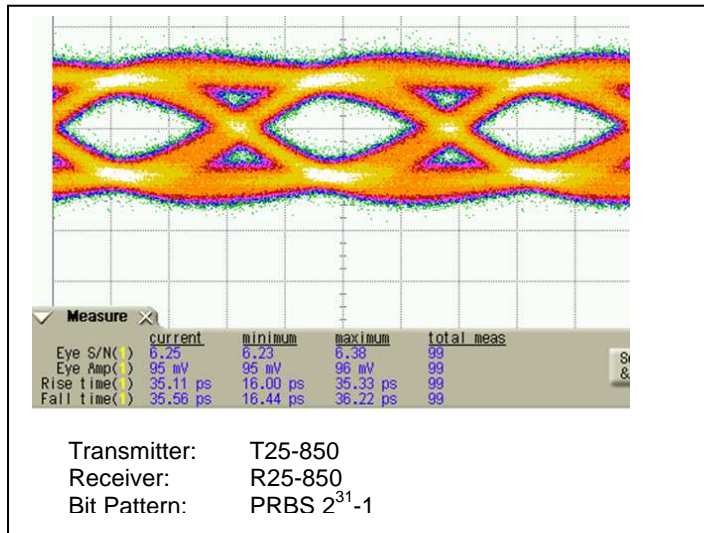


Preliminary

Optional adaptor board

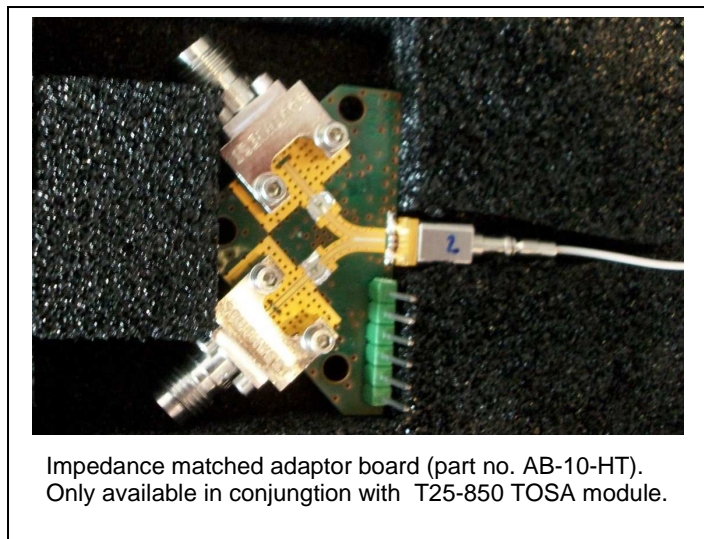


Pin description for AB-10-HT adaptor board

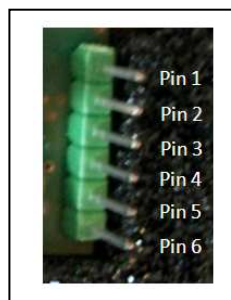

Pin #	Signal	Description
1	Vcc	Power Supply for driver 3.3 V
2	--	not used
3	Xing	Crossing adjustment 0...3 V
4	Vmod	Amplitude adjustment 0...3 V
5	Vbias	Bias current
6	--	not used


Ground is to be supplied by the RF connectors

Pin out

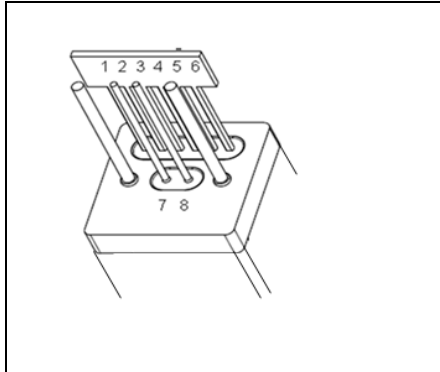


Pin #	Signal	Description
1	Vcc	Power Supply for driver 3.3 V
2	--	not used
3	Xing	Crossing adjustment 0...3 V
4	Vmod	Amplitude adjustment 0...3 V
5	Vbias	Bias current
6		
7	IN high	HF input (high)
8	IN low	HF input (low)

Dimensions

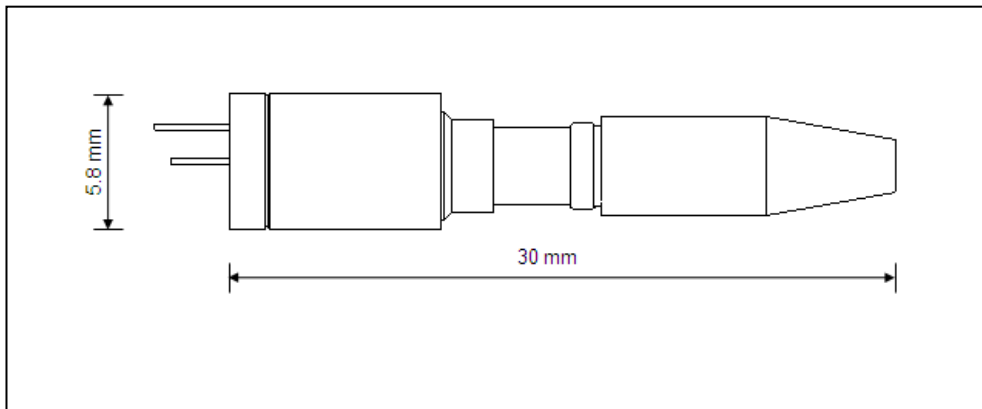

Dimensions (front)

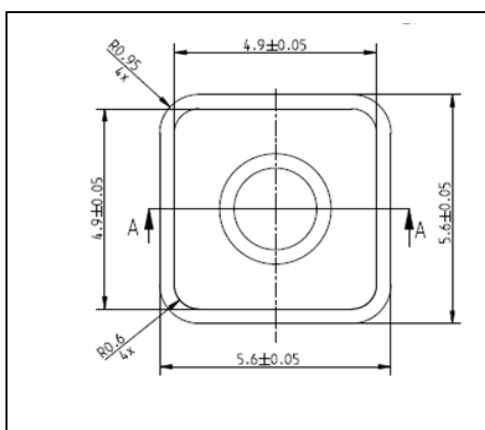

LASER RADIATION. DO NOT VIEW
DIRECTLY WITH OPTICAL
INSTRUMENTS
CLASS 1M LASER PRODUCT

All product specifications and descriptions are subject to change without notice.
Please contact our sales department for additional information and to receive a quotation: sales@v-i-systems.com